




E01


1.00mm Pitch Pin Header Single & Dual Row Dual Body Straight & Right Angle DIP & SMT TYPE (Dual Row: 1.00*1.00mm)

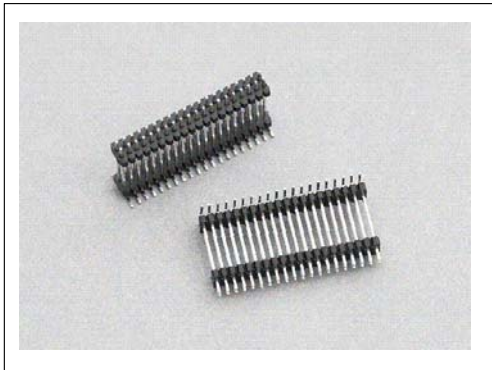

Specification:

Insulator Material:	High Temperature Thermoplastic, UL94V-0.
Contact Material:	Copper Alloy, 0.30x0.30mm.
Contact Plating:	Au or Sn over Nickel.
Current Rating:	1 AMP.
Insulator Resistance:	500 Megohms Min.
Dielectric Withstanding:	500V AC for 1 Minute.
Operating Temperature:	-40°C ~ +105°C.
Max. Processing Temp.:	230°C for 30~60 seconds. 260°C for 10 seconds.

RoHS Compliant

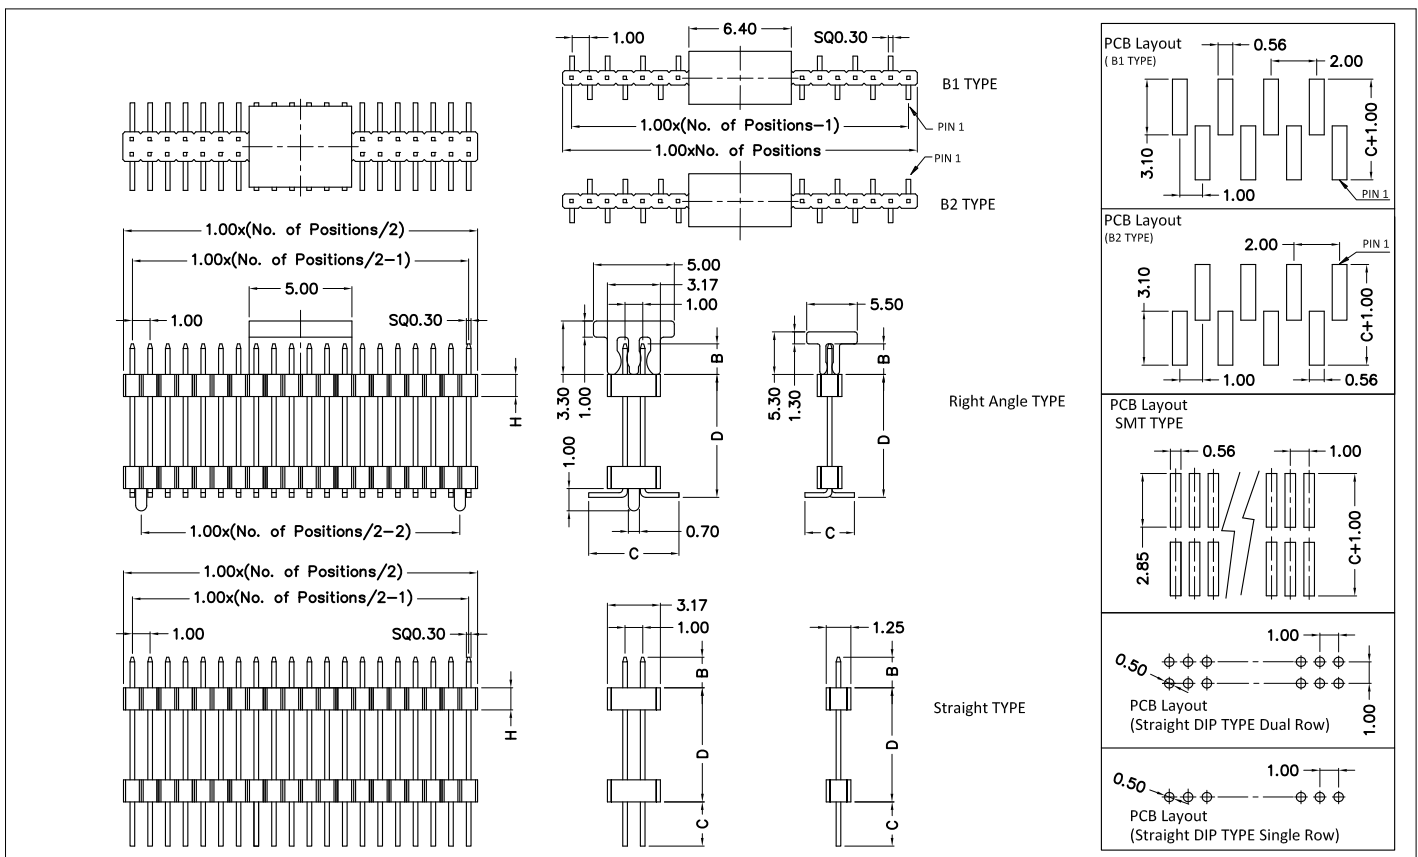

Ordering Information: E01 - XXX - XX - XX - XX/XX/XX - XXX - XX - X - XX

1
2
3
4
5
6
7
8
9

1 --> Series Number:	E01		
2 --> Contact Positions:	Single Row: 002-050, Dual Row: 004-100,		
3 --> Connector Type:	10: Single Row SMT B1 TYPE,	11: Single Row SMT B2 TYPE,	12: Single Row DIP TYPE,
	20: Dual Row SMT TYPE,	21: Dual Row DIP TYPE,	
4 --> Dim. " H " option:	10: H=1.00,	11: H=1.50,	
5 --> Dim. " B, C, D " option:	As request: B/C/D, XX/XX/XX, For Eg: B=7.00, C=7.80, D=6.50,		Code=7.00/7.80/6.50,
6--> Plating option:	100: Full Gold Flash Plated,	500: Tin Plated,	600: Selective Gold Flash Plated
	610: 10U" selective Gold plated,	615: 15U" selective Gold plated	
	620: 20U" selective Gold plated,	630: 30U" selective Gold plated	
7 --> CAP option: (For SMT TYPE only)	00: Without CAP,	01: With CAP,	
8 --> Packing option:	2: Tube for SMT TYPE,	4: Bag for DIP TYPE,	
9 --> Location Peg option: (For Dual Row SMT TYPE only)	00: Without Peg,	01: With Peg,	