





1.27mm Pitch Box Header Dual Row Dual Body Straight DIP & SMT TYPE

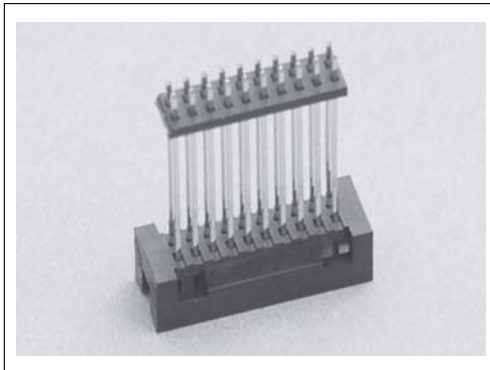

Specification:

Insulator Material:	High Temperature Thermoplastic, UL94V-0.
Contact Material:	Copper Alloy, 0.40x0.40mm.
Contact Plating:	Au or Sn over Nickel.
Current Rating:	1 AMP.
Insulator Resistance:	500 Megohms Min.
Dielectric Withstanding:	500V AC for 1 Minute.
Operating Temperature:	-55°C ~ +105°C.
Max. Processing Temp.:	230°C for 30~60 seconds. 260°C for 10 seconds.

RoHS Compliant

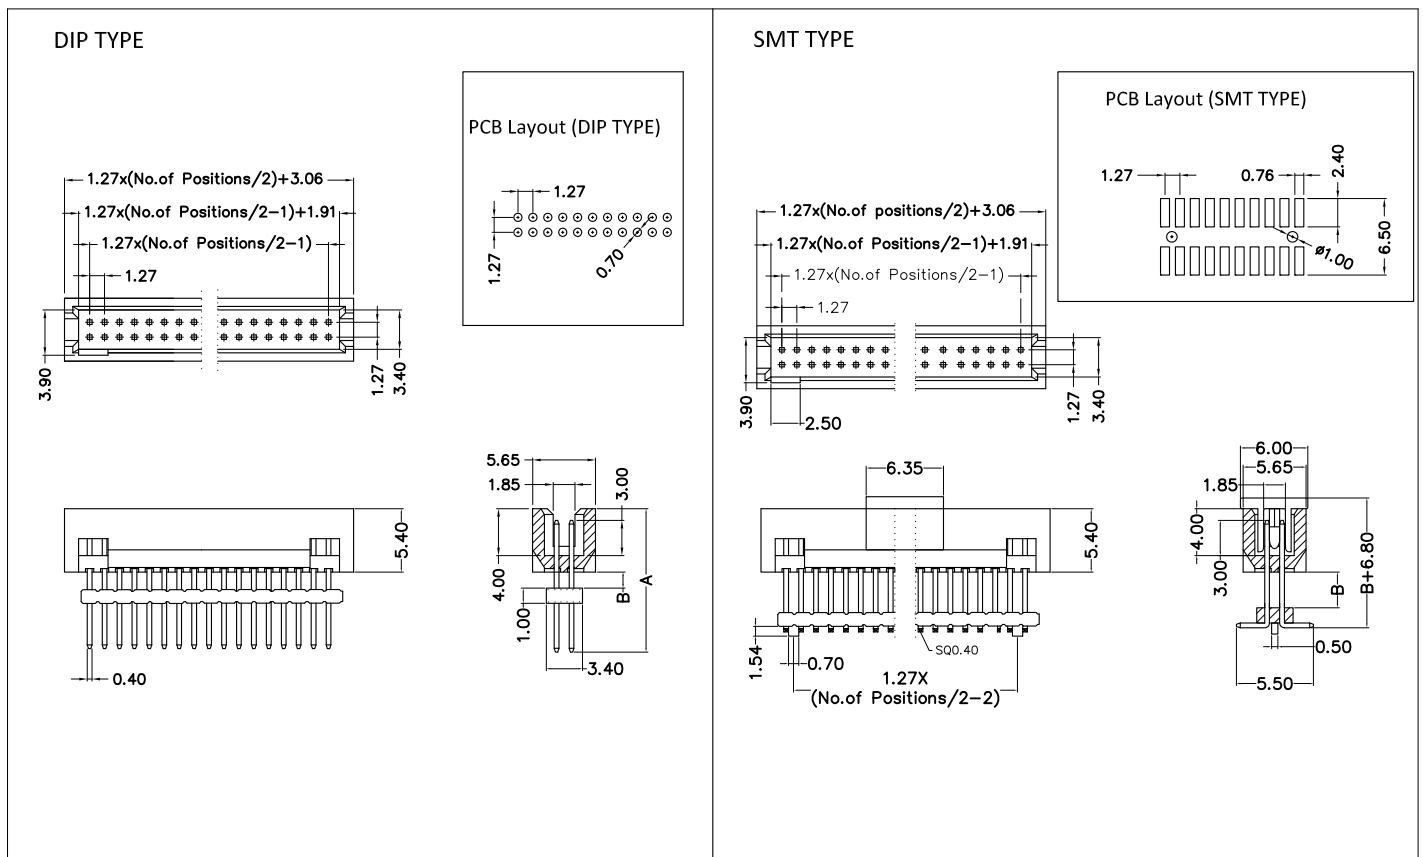

Ordering Information: E05 - XXX - XX - XX/XX - XXX - XX - X - XX

	1	2	3	4	5	6	7	8
1 --> Series Number:	E05							
2 --> Contact Positions:	10~100Pin: 010~100,							
3 --> Connector Type:	10: DIP TYPE,				20: SMT TYPE			
4 --> Dimensions option:	For DIP Type: As request: A/B=XX/XX,				For Eg: A=15.00, B=2.40,		Code=15.00/2.40,	
	For SMT Type: As request: B=XX,				For Eg: B=2.40,		Code=2.40,	
5--> Plating option:	100: Full Gold Flash Plated,		500: Tin Plated,		600: Selective Gold Flash Plated			
	610: 10U" selective Gold plated,		615: 15U" selective Gold plated					
	620: 20U" selective Gold plated,		630: 30U" selective Gold plated					
6 --> CAP option: (For SMT TYPE only)	00: Without CAP,			01: With CAP,				
7 --> Packing option:	2: Tube,			3: T&R,				
8 --> Location Peg option: (For SMT TYPE only)	00: Without Peg,			01: With Peg,				