




# E06


## 1.27mm Pitch Box Header Dual Row Single Body Straight & Right Angle DIP & SMT TYPE

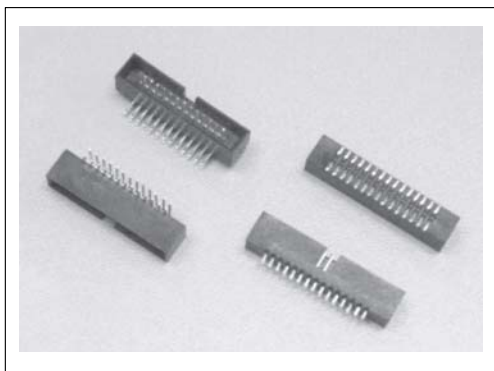

### Specification:

Insulator Material:	High Temperature Thermoplastic, UL94V-0.
Contact Material:	Copper Alloy, 0.40x0.40mm.
Contact Plating:	Au or Sn over Nickel.
Current Rating:	1 AMP.
Insulator Resistance:	500 Megohms Min.
Dielectric Withstanding:	500V AC for 1 Minute.
Operating Temperature:	-55°C ~ +105°C.
Max. Processing Temp.:	230°C for 30~60 seconds. 260°C for 10 seconds.

RoHS Compliant

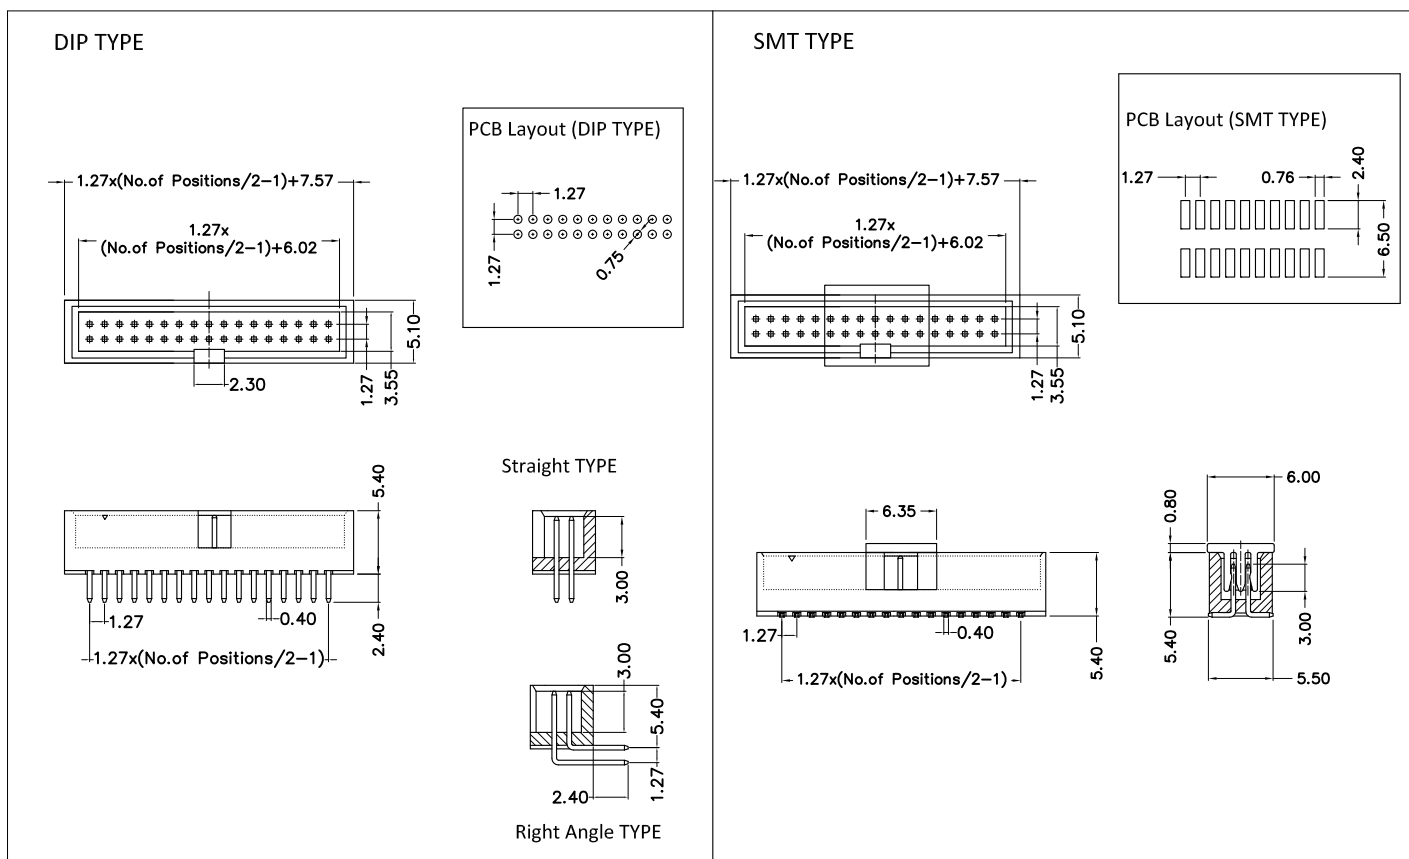

### Ordering Information: E06 - XXX - XX - XXX - X - XX

1      2      3      4      5      6

1 --> Series Number:	E06					
2 --> Contact Positions:	10~100Pin: 010~100,					
3 --> Connector Type:	10: Straight DIP TYPE,		11: Right Angle DIP TYPE,		20: SMT TYPE	
4--> Plating option:	100: Full Gold Flash Plated,		500: Tin Plated,		600: Selective Gold Flash Plated	
	610: 10U" selective Gold plated,		615: 15U" selective Gold plated			
	620: 20U" selective Gold plated,		630: 30U" selective Gold plated			
5 --> Packing option:	2: Tube,		3: T&R,			
6 --> CAP option: ( For SMT TYPE only )	00: Without CAP,		01: With CAP,			