



E08


2.00mm Pitch Ejector Header Dual Row Single Body Straight DIP TYPE & SMT TYPE



Specification:

Insulator Material:	High Temperature Thermoplastic, UL94V-0.
Contact Material:	Copper Alloy, 0.50x0.50mm.
Contact Plating:	Au or Sn over Nickel.
Current Rating:	1 AMP.
Insulator Resistance:	500 Megohms Min.
Dielectric Withstanding:	500V AC for 1 Minute.
Operating Temperature:	-55°C ~ +105°C.
Max. Processing Temp.:	230°C for 30~60 seconds. 260°C for 10 seconds.

RoHS Compliant

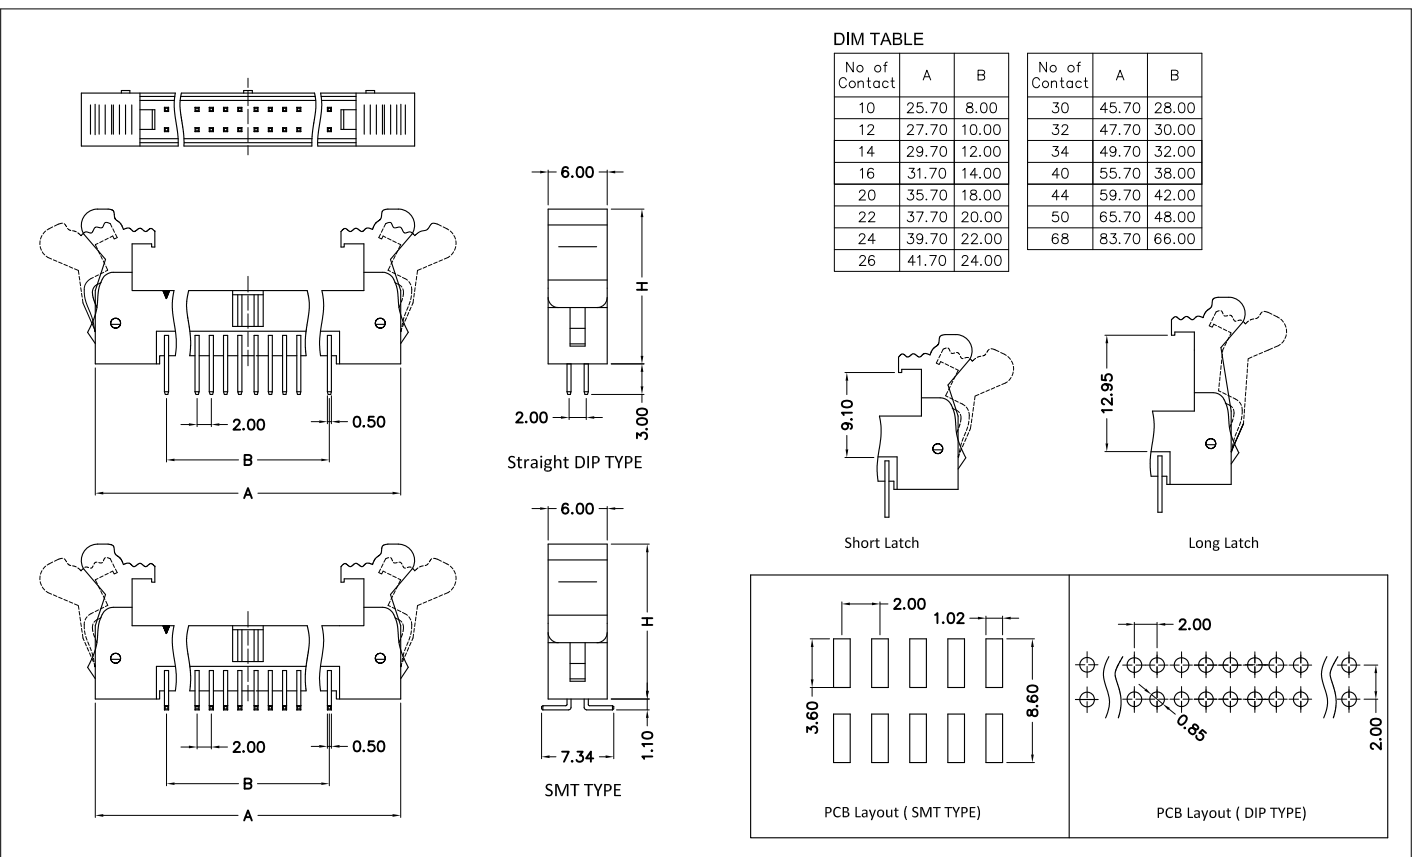

Ordering Information: E08 - XXX - XX - XXX - XX - XX

1 2 3 4 5 6

1 --> Series Number:	E08	
2 --> Contact Positions:	06-68PIN: 006-068,	
3 --> Connector Type:	10: DIP Type,	20: SMT Type,
4--> Plating option:	100: Full Gold Flash Plated,	600: Selective Gold Flash Plated
	610: 10U" selective Gold plated,	615: 15U" selective Gold plated
	620: 20U" selective Gold plated,	630: 30U" selective Gold plated
5 --> Latch option:	10: With Short Latch,H=16.95,	11: With Long Latch,H=20.80,
6--> Cap option:	00: Without Cap,	01: With Cap (only for SMT Type)