




E10


2.54mm Pitch Box Header Dual Row Single Body Straight & Right Angle DIP & SMT TYPE

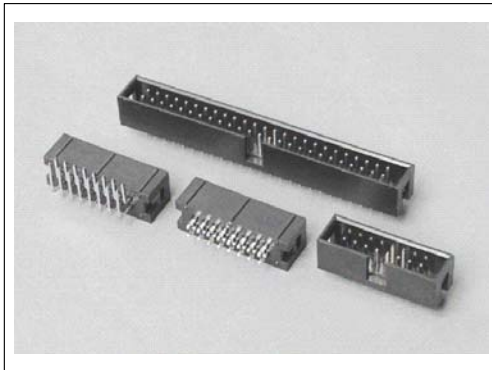

Specification:

Insulator Material:	High Temperature Thermoplastic, UL94V-0.
Contact Material:	Copper Alloy, 0.64x0.64mm.
Contact Plating:	Au or Sn over Nickel.
Current Rating:	3 AMP.
Insulator Resistance:	5000 Megohms Min.
Dielectric Withstanding:	500V AC for 1 Minute.
Operating Temperature:	-55°C ~ +105°C.
Max. Processing Temp.:	230°C for 30~60 seconds. 260°C for 10 seconds.

RoHS Compliant

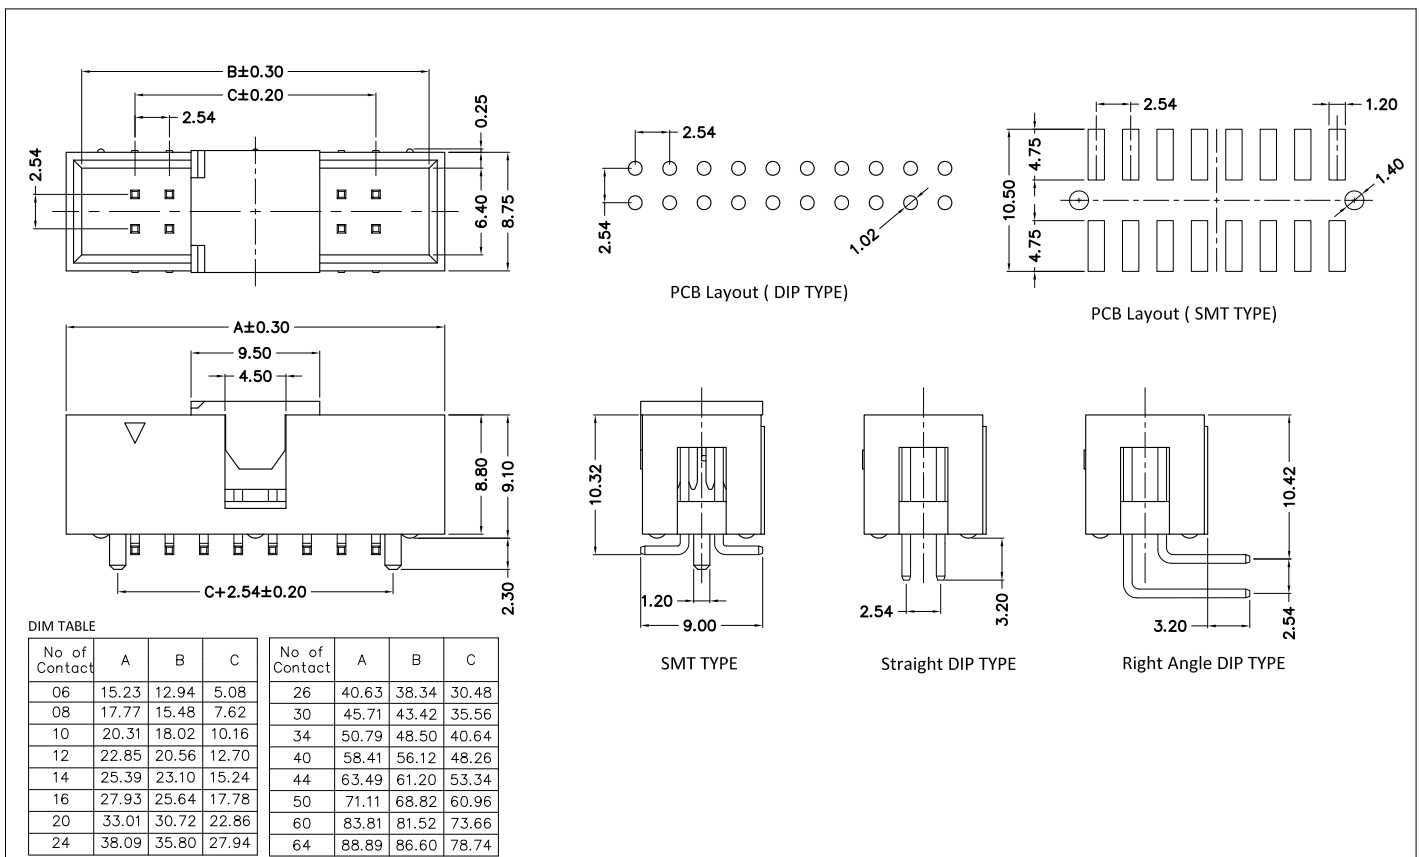

Ordering Information: E10 - XX - X - XXX - X - X - X

1 2 3 4 5 6 7

1 --> Series Number:	E10		
2 --> Contact Positions:	SEE DIM TABLE		
3 --> Connector Type:	1: Straight DIP Type,	2: Right Angle DIP Type,	3: SMT Type,
4--> Plating option:	100: Full Gold Flash Plated,	500: Tin Plated,	600: Selective Gold Flash Plated
	610: 10U" selective Gold plated,	615: 15U" selective Gold plated	
	620: 20U" selective Gold plated,	630: 30U" selective Gold plated	
5 --> CAP option: (For SMT Type only)	1: With CAP,	2: Without CAP,	
6 --> Packing option:	1: Tray ,	2: Tube,	3: T&R,
7 --> Location option:	1: With Peg,	2: Without Peg,	