





## 1.27mm Pitch Pin Header Single & Dual Row Single Body Right Angle DIP TYPE ( Dual Row: 1.27\*2.54mm)

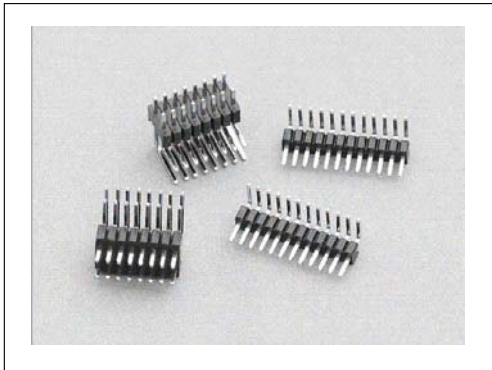

### Specification:

Insulator Material:	High Temperature Thermoplastic, UL94V-0.
Contact Material:	Copper Alloy, 0.46x0.46mm.
Contact Plating:	Au or Sn over Nickel.
Current Rating:	1 AMP.
Insulator Resistance:	500 Megohms Min.
Dielectric Withstanding:	500V AC for 1 Minute.
Operating Temperature:	-40°C ~ +105°C.
Max. Processing Temp.:	230°C for 30~60 seconds. 260°C for 10 seconds.

RoHS Compliant

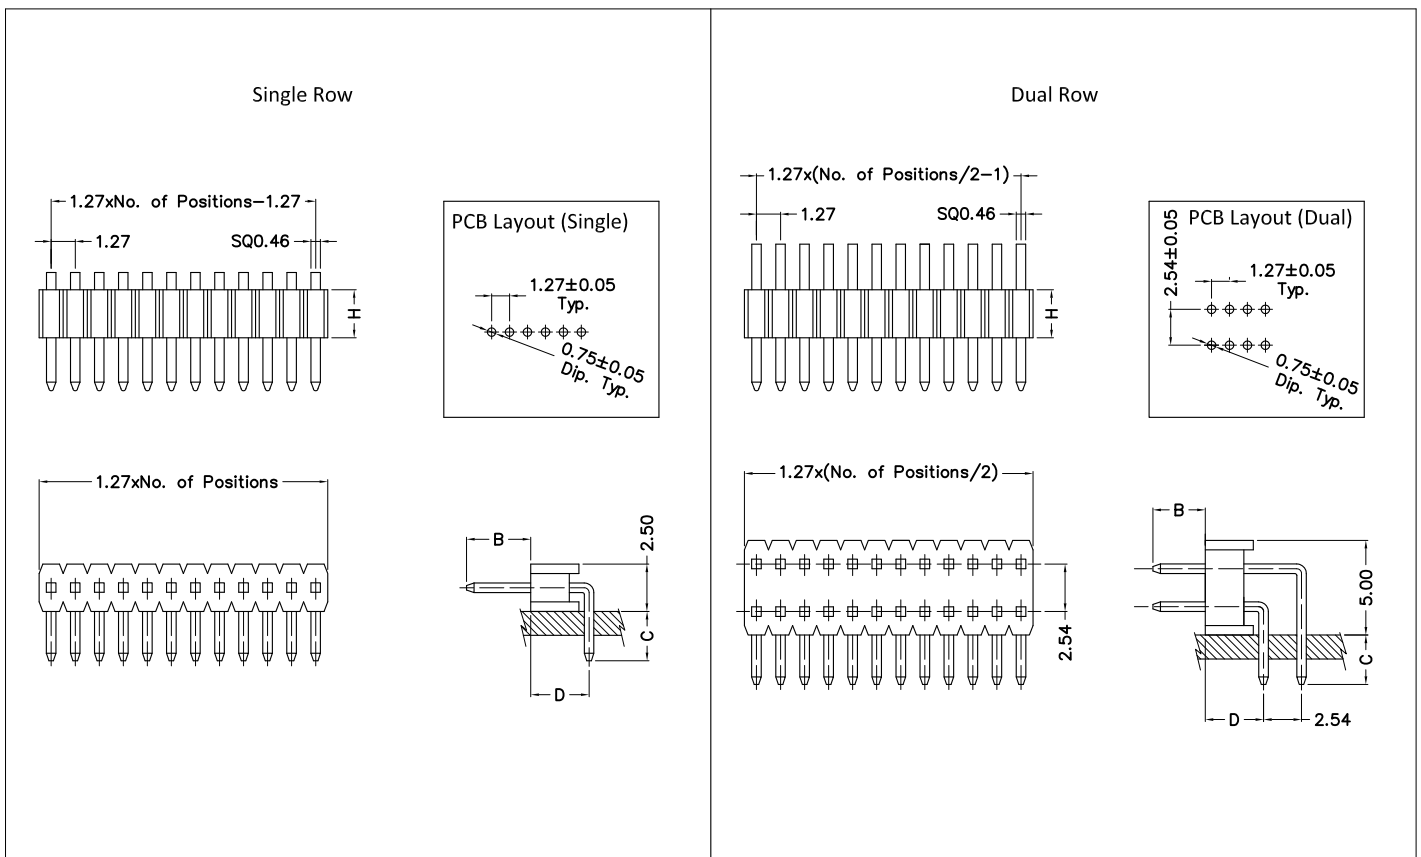

**Ordering Information:** E13 - XXX - XX - XX - XXX  
 1            2            3            4            5

1 --> Series Number:	E13		
2 --> Contact Positions:	Single row: 002-040,	Dual row: 004-100,	
3 --> Insulator option:	10: (Single Row)H=1.70	11: (Single Row)H=2.54	20: (Dual Row)H=2.54
4 --> Dim. "B, C, D" option:	10: B=2.80, C=2.60, D=3.90	20: B=4.00, C=2.60, D=3.90	30: B=6.00, C=2.60, D=3.90
	As request: B/C/D=XX/XX/XX, For Eg: B=2.00, C=3.00, D=4.50, Code=2.00/3.00/4.50,		
5--> Plating option:	100: Full Gold Flash Plated	500: Tin Plated	600: Selective Gold Flash Plated
	610: 10U" selective Gold plated	615: 15U" selective Gold plated	
	620: 20U" selective Gold plated	630: 30U" selective Gold plated	