





1.27mm Pitch Pin Header Single & Dual Row Dual Body Straight DIP TYPE (Dual Row: 1.27*2.54mm)

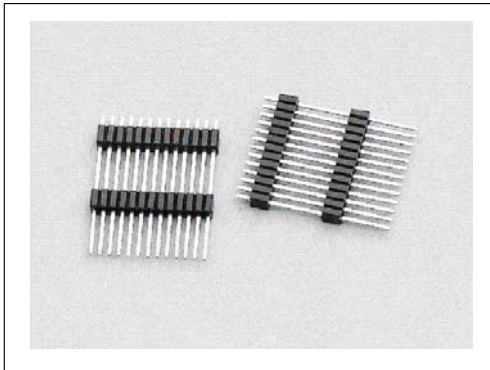

Specification:

Insulator Material:	High Temperature Thermoplastic, UL94V-0.
Contact Material:	Copper Alloy, 0.46x0.46mm.
Contact Plating:	Au or Sn over Nickel.
Current Rating:	1 AMP.
Insulator Resistance:	500 Megohms Min.
Dielectric Withstanding:	500V AC for 1 Minute.
Operating Temperature:	-40°C ~ +105°C.
Max. Processing Temp.:	230°C for 30~60 seconds. 260°C for 10 seconds.

RoHS Compliant

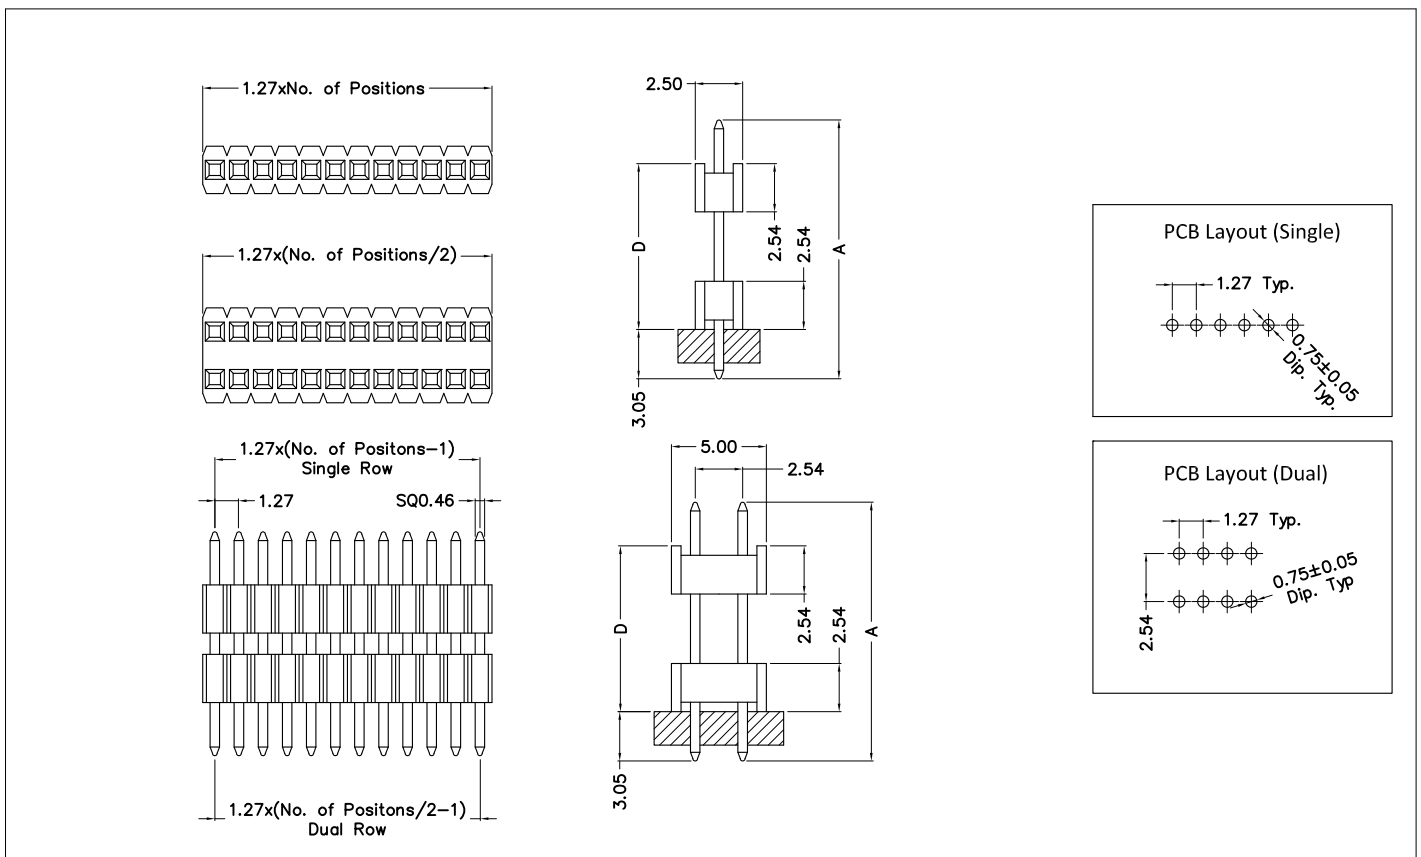

Ordering Information: E18 - XXX - XX - XX - XX - XXX

1 --> Series Number:	E18					
2 --> Contact Positions:	Single Row: 002-050,		Dual Row: 004-100,			
3 --> Contact Row:	10: Single Row		20: Dual Row.			
4 --> Dim. "A" option:	10: A=10.41,	11: A=10.80,	12: A=11.00,	13: A=11.43		
	14: A=12.83,	15: A=14.10,	16: A=15.49,	17: A=15.88,	18: A=16.51	
	19: A=17.91,	20: A=19.18,	21: A=20.96,	22: A=26.67,		
	As request: A=XX,		For Eg: A=13.00,	Code=16.00,		
5 --> Stacker height option:	As request: D=XX,		For Eg: D=5.08,	Code=5.08,	D=6.35,	Code=6.35,
6 --> plating option:	100: Full Gold Flash Plated		500: Tin Plated		600: Selective Gold Flash Plated	
	610: 10U" selective Gold plated		615: 15U" selective Gold plated			
	620: 20U" selective Gold plated		630: 30U" selective Gold plated			