




E25


1.27mm Pitch Pin Header Dual Row Single Body Right Angle & Vertical & Horizontal DIP & SMT TYPE (1.27*1.27mm)

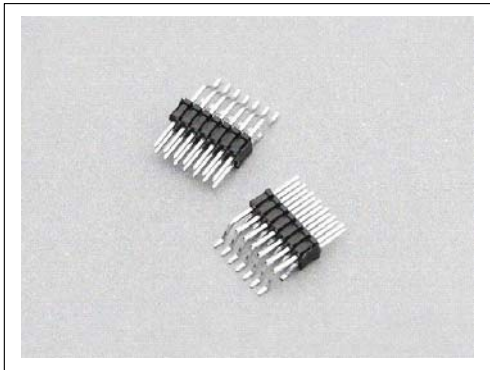

Specification:

Insulator Material:	High Temperature Thermoplastic, UL94V-0.
Contact Material:	Copper Alloy, 0.40x0.40mm.
Contact Plating:	Au or Sn over Nickel.
Current Rating:	1 AMP.
Insulator Resistance:	500 Megohms Min.
Dielectric Withstanding:	500V AC for 1 Minute.
Operating Temperature:	-40°C ~ +105°C.
Max. Processing Temp.:	230°C for 30~60 seconds. 260°C for 10 seconds.

RoHS Compliant

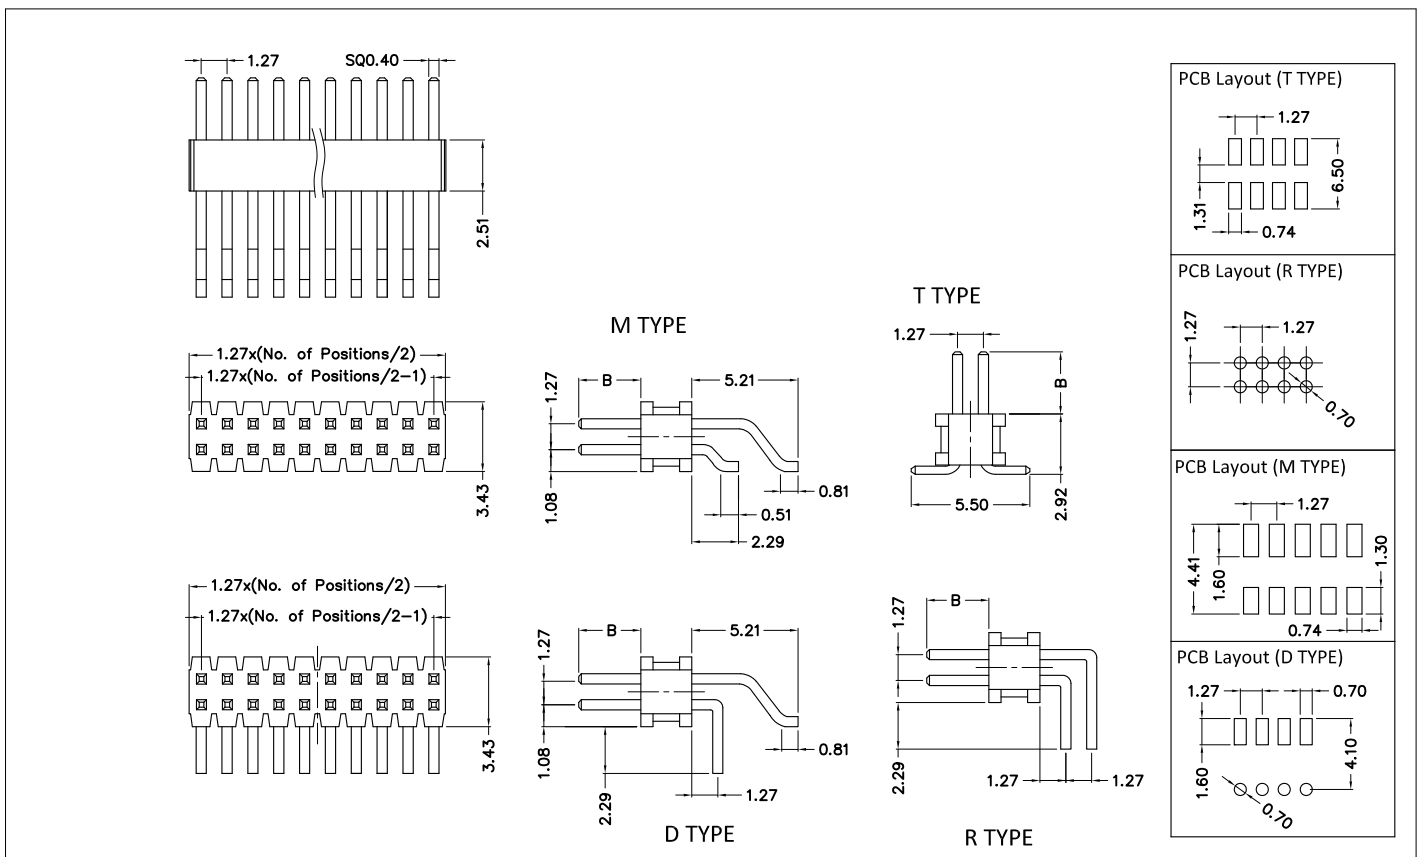

Ordering Information: E25 - XXX - XX - XX - XXX - XX - X - XX

1
2
3
4
5
6
7
8

1 --> Series Number:	E25			
2 --> Contact Positions:	4~70Pin: 004~070,			
3 --> Connector Type:	10: M TYPE,	11: T TYPE,	12: R TYPE,	13: D TYPE
4 --> Dim. "B" option:	10: B=1.65,	11: B=1.91,	12: B=3.05,	13: B=3.81
5--> Plating option:	100: Full Gold Flash Plated,		500: Tin Plated,	
	610: 10U" selective Gold plated,		600: Selective Gold Flash Plated	
	620: 20U" selective Gold plated,		615: 15U" selective Gold plated	
			630: 30U" selective Gold plated	
6 --> CAP option:	00: Without CAP,		01: With CAP,	
7 --> Packing option:	2: Tube,		3: T&R,	
8 --> Location Peg option:	00: Without Peg,		01: With Peg,	