




E29


1.27mm Pitch Pin Header Single & Dual Row Dual Body Vertical SMT TYPE (Dual Row: 1.27*1.27mm)

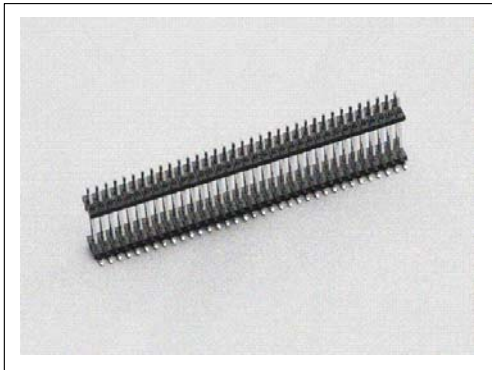

Specification:

Insulator Material:	High Temperature Thermoplastic, UL94V-0.
Contact Material:	Copper Alloy, 0.40x0.40mm.
Contact Plating:	Au or Sn over Nickel.
Current Rating:	1 AMP.
Insulator Resistance:	500 Megohms Min.
Dielectric Withstanding:	500V AC for 1 Minute.
Operating Temperature:	-40°C ~ +105°C.
Max. Processing Temp.:	230°C for 30~60 seconds. 260°C for 10 seconds.

RoHS Compliant

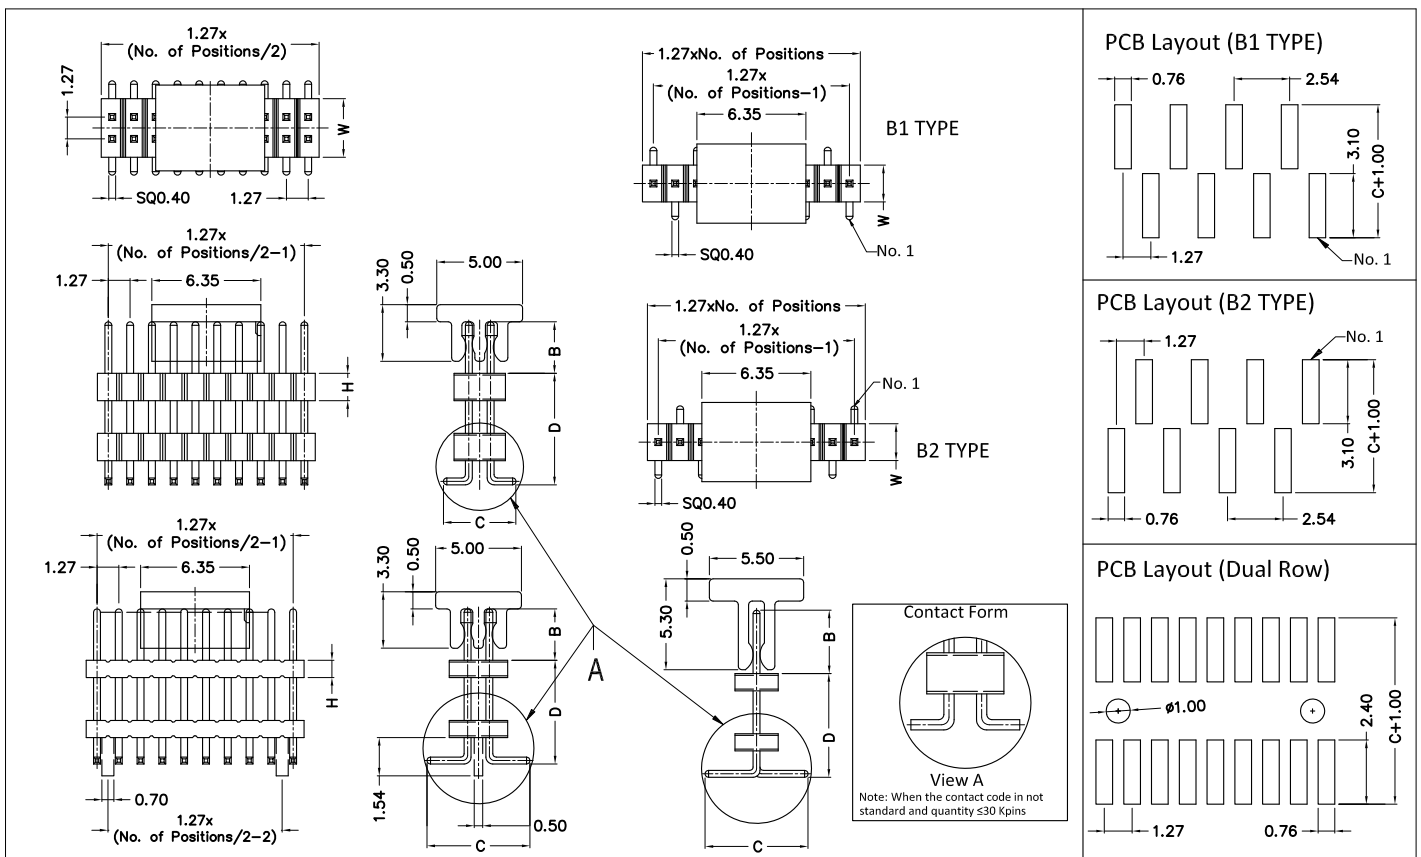

Ordering Information: E29 - XXX - XX - XX - XX/XX/XX - XXX - XX - X - XX

	1	2	3	4	5	6	7	8	9
1 --> Series Number:	E29								
2 --> Contact Positions:	Single Row: 002~050,				Dual Row: 004~100,				
3 --> Layout option:	01: Single Row B1 TYPE,		02: Single Row B2 TYPE,			03: Dual Row			
4 --> Insulator option:	For Single Row TYPE: 10: H=1.00, W=2.10, 11: H=1.50, W=2.10, 12: H=1.70, W=2.10, 13: H=2.50, W=2.10 14: H=1.00, W=2.50, 15: H=1.50, W=2.50, 16: H=1.70, W=2.50, 17: H=2.50, W=2.50 For Dual Row TYPE: 20: H=1.00, W=3.40, 21: H=1.60, W=3.00, 22: H=2.50, W=3.00, 23: H=2.51, W=3.43,								
5 --> Dim. "B, C, D" option:	As request: XX/XX/XX, For Eg: B=3.00, C=5.50, D=2.60, Code: 3.00/5.50/2.60,								
6 --> Plating option:	100: Full Gold Flash Plated,			500: Tin Plated,			600: Selective Gold Flash Plated		
	610: 10U" selective Gold plated,			615: 15U" selective Gold plated					
	620: 20U" selective Gold plated,			630: 30U" selective Gold plated					
7 --> CAP option:	00: Without CAP,				01: With CAP,				
8 --> Packing option:	2: Tube,				3: T&R,				
9 --> Location Peg option: (For Dual Row H=1.00mm Insulator only)	00: Without Peg,				01: With Peg,				