




E32


2.00mm Pitch Pin Header Single & Dual & Triple & Four Row Single Body Straight & Right Angle DIP TYPE

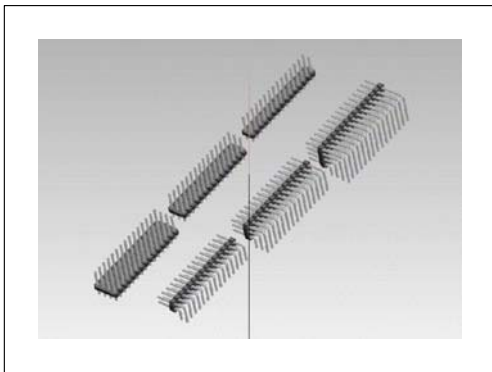

Specification:

Insulator Material:	High Temperature Thermoplastic, UL94V-0.
Contact Material:	Copper Alloy, 0.50x0.50mm.
Contact Plating:	Au or Sn over Nickel.
Current Rating:	1 AMP.
Insulator Resistance:	500 Megohms Min.
Dielectric Withstanding:	500V AC for 1 Minute.
Operating Temperature:	-40°C ~ +105°C.
Max. Processing Temp.:	230°C for 30~60 seconds. 260°C for 10 seconds.

RoHS Compliant

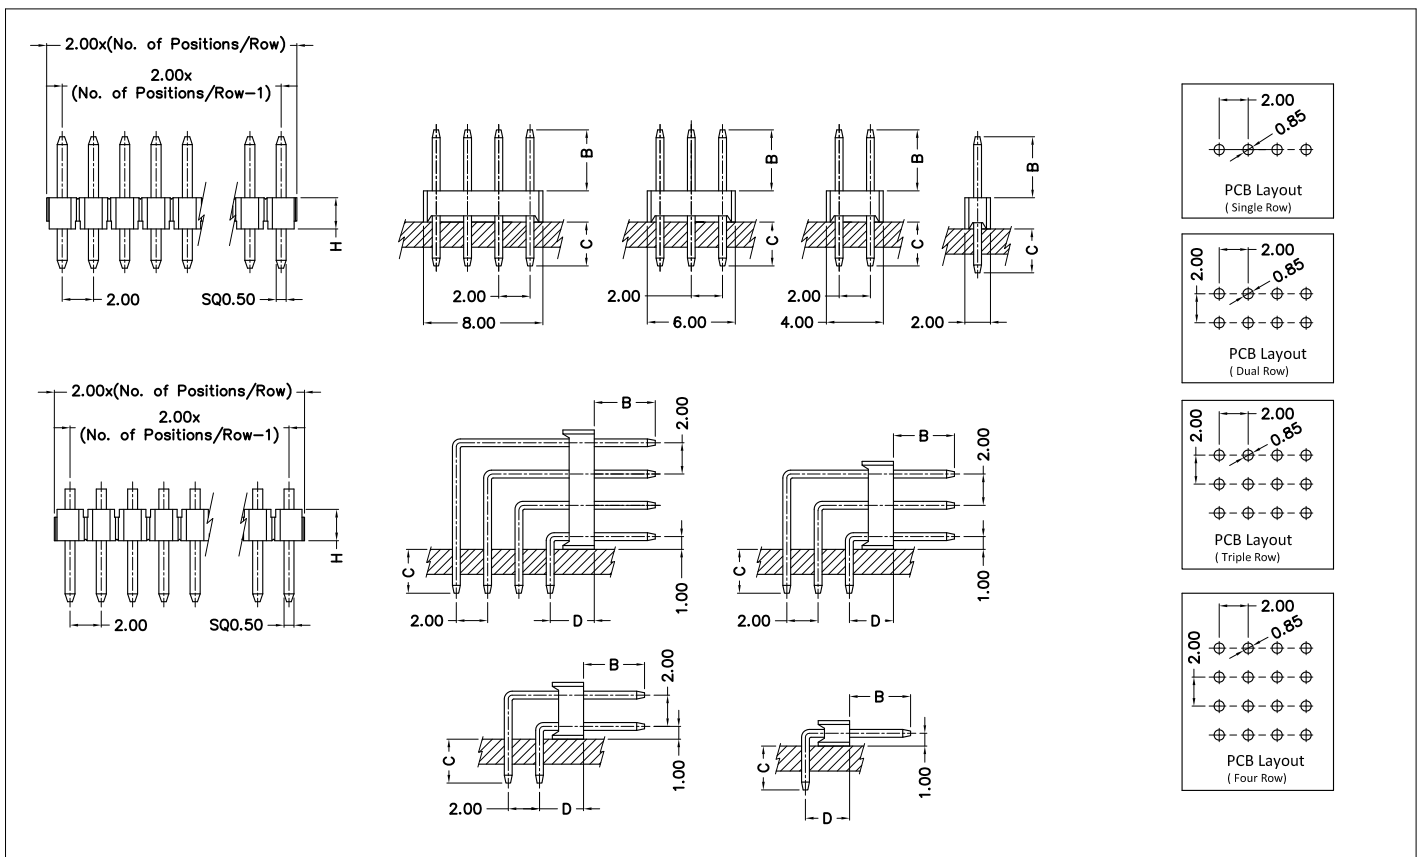

Ordering Information: E32 - XXX - XX - XX - XX/XX/XX - XXX

	1	2	3	4	5	6
1 --> Series Number:	E32					
2 --> Contact Positions:	Single Row: 002~040,		Dual Row: 004~080,		Triple Row: 006~120, Four Row: 008~160,	
3 --> Contact Row:	10: Single Row,		20: Dual Row,		30: Triple Row, 40: Four Row,	
4 --> Profile option:	10: H=1.50,		11: H=2.00,			
5 --> Dim. " B, C, D " option:	As request: B/C/D, XX/XX/XX,		For Eg: B=7.00, C=7.80, D=6.50,		Code=7.00/7.80/6.50,	
6 --> Plating option:	100: Full Gold Flash Plated,		500: Tin Plated,		600: Selective Gold Flash Plated	
	610: 10U" selective Gold plated,		615: 15U" selective Gold plated			
	620: 20U" selective Gold plated,		630: 30U" selective Gold plated			