




E36


2.00mm Pitch Pin Header Single & Dual Row Dual Body Right Angle DIP TYPE (Up-Right)

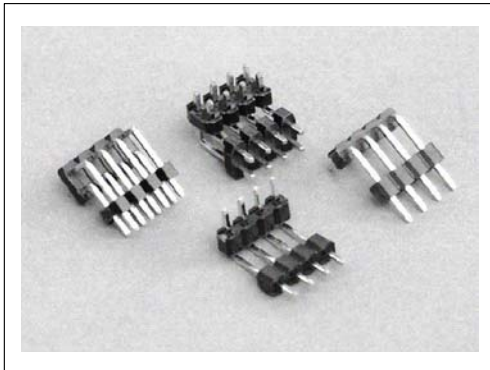

Specification:

Insulator Material:	High Temperature Thermoplastic, UL94V-0.
Contact Material:	Copper Alloy, 0.50x0.50mm.
Contact Plating:	Au or Sn over Nickel.
Current Rating:	3 AMP.
Insulator Resistance:	500 Megohms Min.
Dielectric Withstanding:	500V AC for 1 Minute.
Operating Temperature:	-40°C ~ +105°C.
Max. Processing Temp.:	230°C for 30~60 seconds. 260°C for 10 seconds.

RoHS Compliant

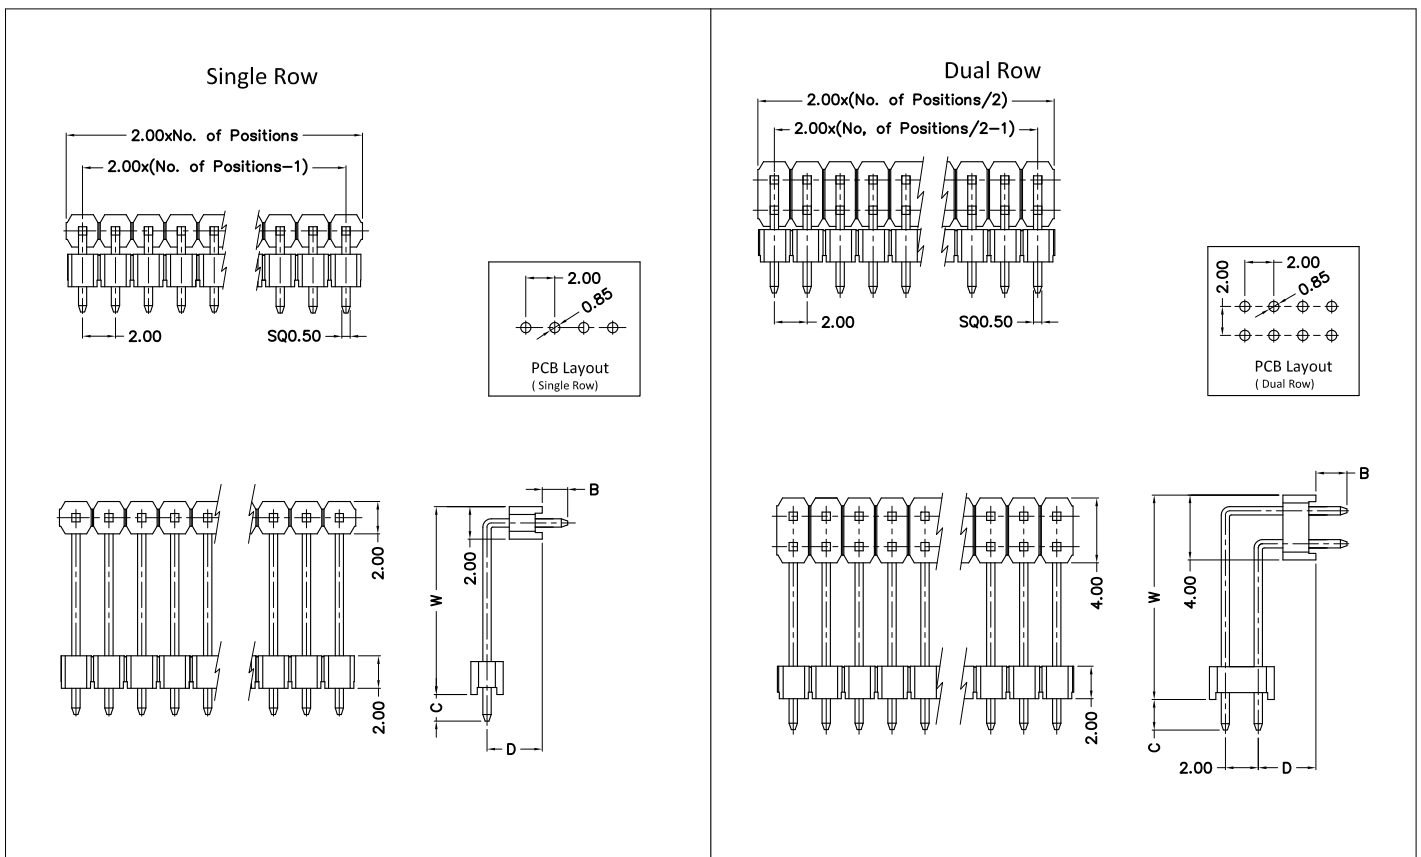

Ordering Information: E36 - XXX - XX - XX - XXX

1 2 3 4 5

1 --> Series Number:	E36	
2 --> Contact Positions:	Single Row: 002-040,	Dual Row: 004-080,
3 --> Contact Row:	10: Single Row,	20: Dual Row,
4 --> Dimensions option:	10: B=4.00, C=3.30, D=3.90, W=8.60,	11: B=4.20, C=3.30, D=3.90, W=9.70,
	As request: B/C/D/W=XX/XX/XX/XX,	For Eg: B=4.40, C=3.10, D=5.80, W=12.30, Code=4.40/3.10/5.80/12.30,
5--> Plating option:	100: Full Gold Flash Plated,	500: Tin Plated, 600: Selective Gold Flash Plated
	610: 10U" selective Gold plated,	615: 15U" selective Gold plated
	620: 20U" selective Gold plated,	630: 30U" selective Gold plated