




# F01


## 2.54mm Pitch Female Header Single & Dual & Triple Row Straight DIP TYPE

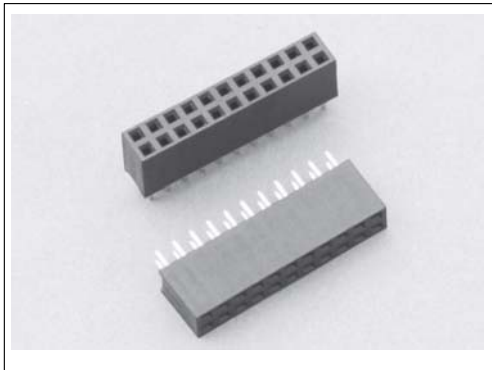

### Specification:

Insulator Material:	High Temperature Thermoplastic, UL94V-0.
Contact Material:	Copper Alloy, 0.64x0.64mm.
Contact Plating:	Au or Sn over Nickel.
Current Rating:	3 AMP.
Contact Resistance:	20 Milliohms Max.
Insulator Resistance:	1000 Megohms Min.
Dielectric Withstanding:	500V AC for 1 Minute.
Operating Temperature:	-40°C ~ +105°C.
Max. Processing Temp.:	230°C for 30~60 seconds. 260°C for 10 seconds.

RoHS Compliant

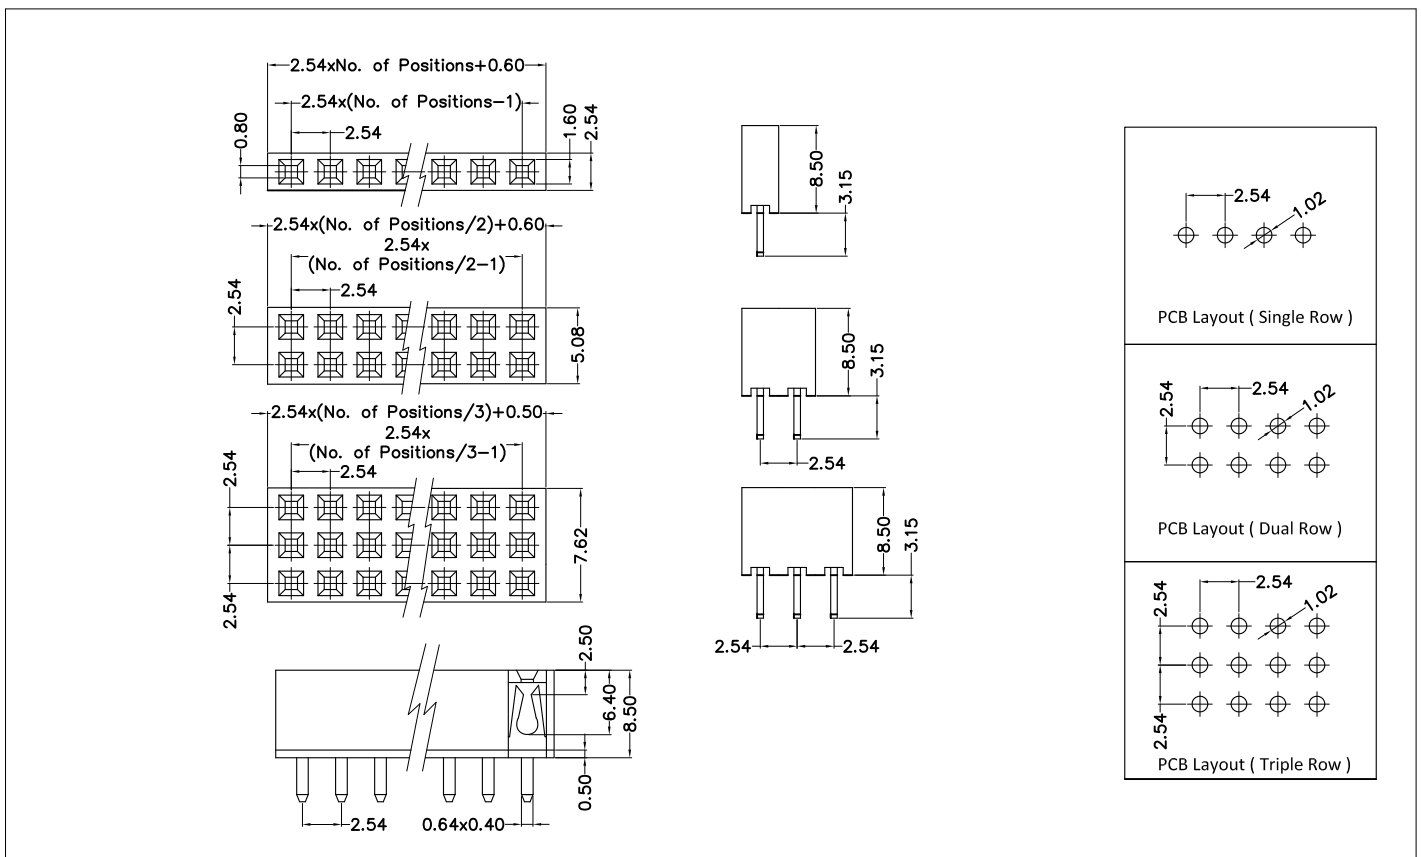

### Ordering Information: F01 - XXX - XX - XXX

1 --> Series Number:	F01		
2 --> Contact Positions:	Single Row: 002~040,	Dual Row: 004~080,	Triple Row: 009~096,
3 --> Contact Row:	10: Single Row,	20: Dual Row,	30: Triple Row,
4 --> Plating option:	100: Full Gold Flash Plated	500: Tin Plated	600: Selective Gold Flash Plated
	610: 10U" selective Gold plated	615: 15U" selective Gold plated	
	620: 20U" selective Gold plated	630: 30U" selective Gold plated	