




# F02


## 1.27mm Pitch Female Header Single & Dual Row Straight DIP TYPE ( Dual Row: 1.27\*2.54mm )

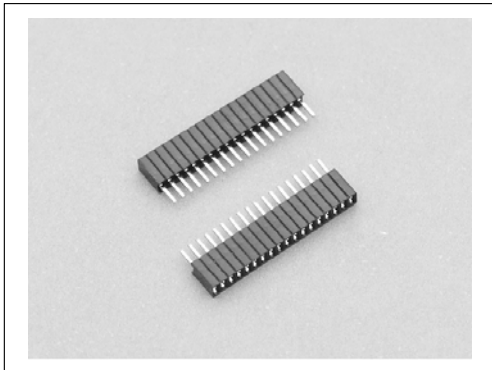

### Specification:

Insulator Material:	High Temperature Thermoplastic, UL94V-0.
Contact Material:	Copper Alloy, 0.30x0.30mm.
Contact Plating:	Au or Sn over Nickel.
Current Rating:	1 AMP.
Contact Resistance:	20 Milliohms Max.
Insulator Resistance:	500 Megohms Min.
Dielectric Withstanding:	500V AC for 1 Minute.
Operating Temperature:	-40°C ~ +105°C.
Max. Processing Temp.:	230°C for 30~60 seconds. 260°C for 10 seconds.

RoHS Compliant

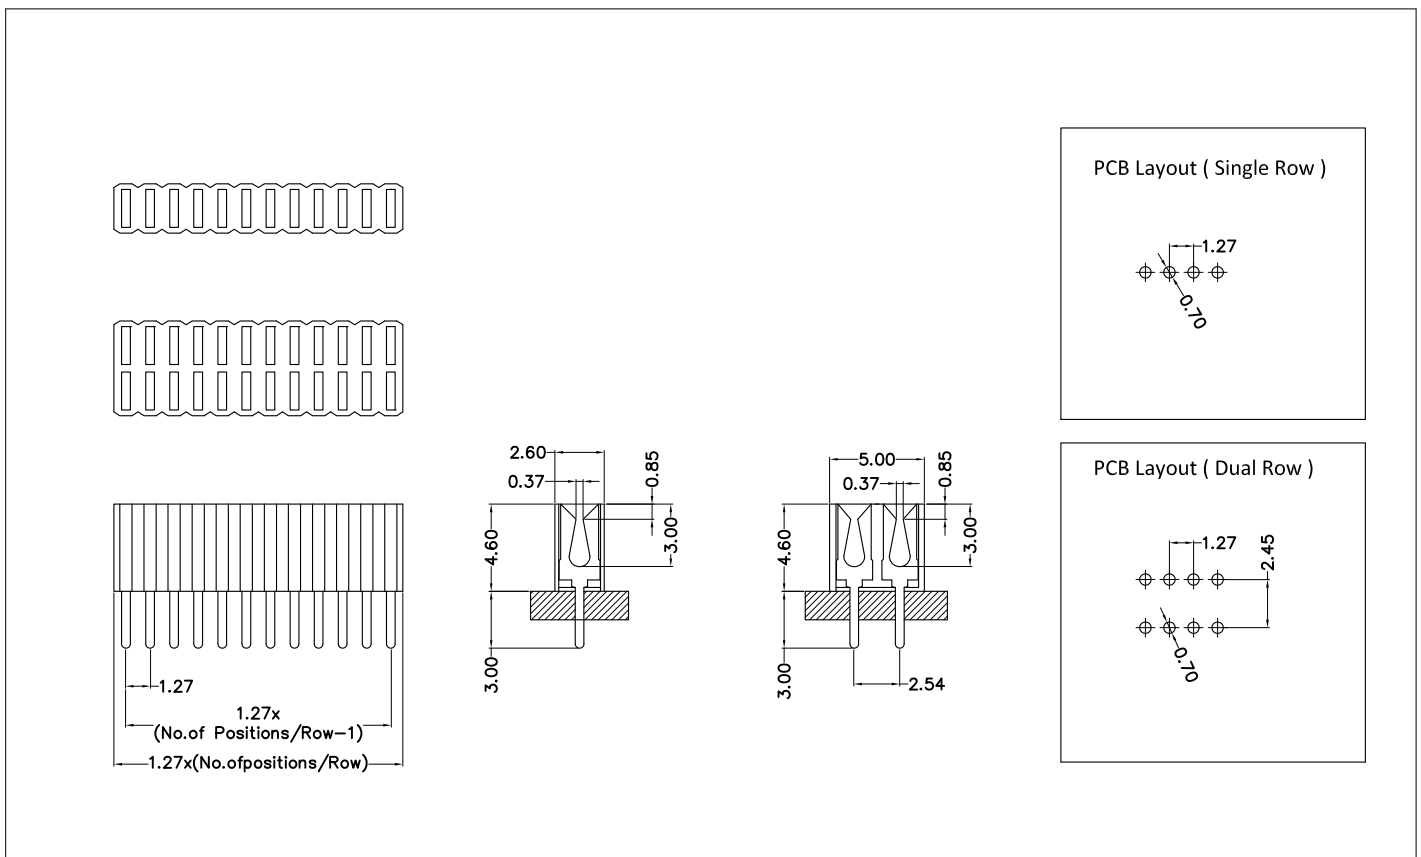

### Ordering Information: F02 - XXX - XX - XXX

1
2
3
4

1 --> Series Number:	F02		
2 --> Contact Positions:	Single Row: 002~040,	Dual Row: 004~100,	
3 --> Contact Row:	10: Single Row,	20: Dual Row,	
4 --> Plating option:	100: Full Gold Flash plated,	500: Tin Plated,	600: Selective Gold Flash Plated,
	610: 10U" selective Gold plated,	615: 15U" selective Gold plated,	
	620: 20U" selective Gold plated,	630: 30U" selective Gold plated,	