




# F03


## 1.27mm Pitch Female Header Single & Dual Row Straight & Right Angle DIP TYPE

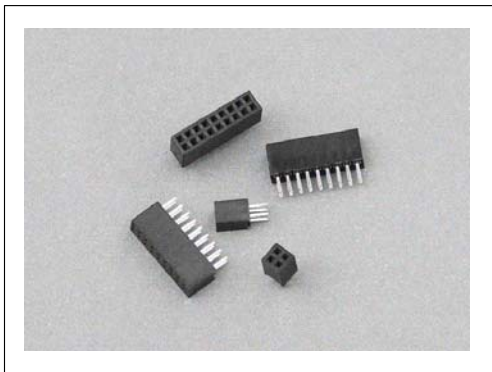

### Specification:

Insulator Material:	High Temperature Thermoplastic, UL94V-0.
Contact Material:	Copper Alloy.
Contact Plating:	Au or Sn over Nickel.
Current Rating:	1 AMP.
Contact Resistance:	20 Milliohms Max.
Insulator Resistance:	500 Megohms Min.
Dielectric Withstanding:	500V AC for 1 Minute.
Operating Temperature:	-40°C ~ +105°C.
Max. Processing Temp.:	230°C for 30~60 seconds. 260°C for 10 seconds.

RoHS Compliant

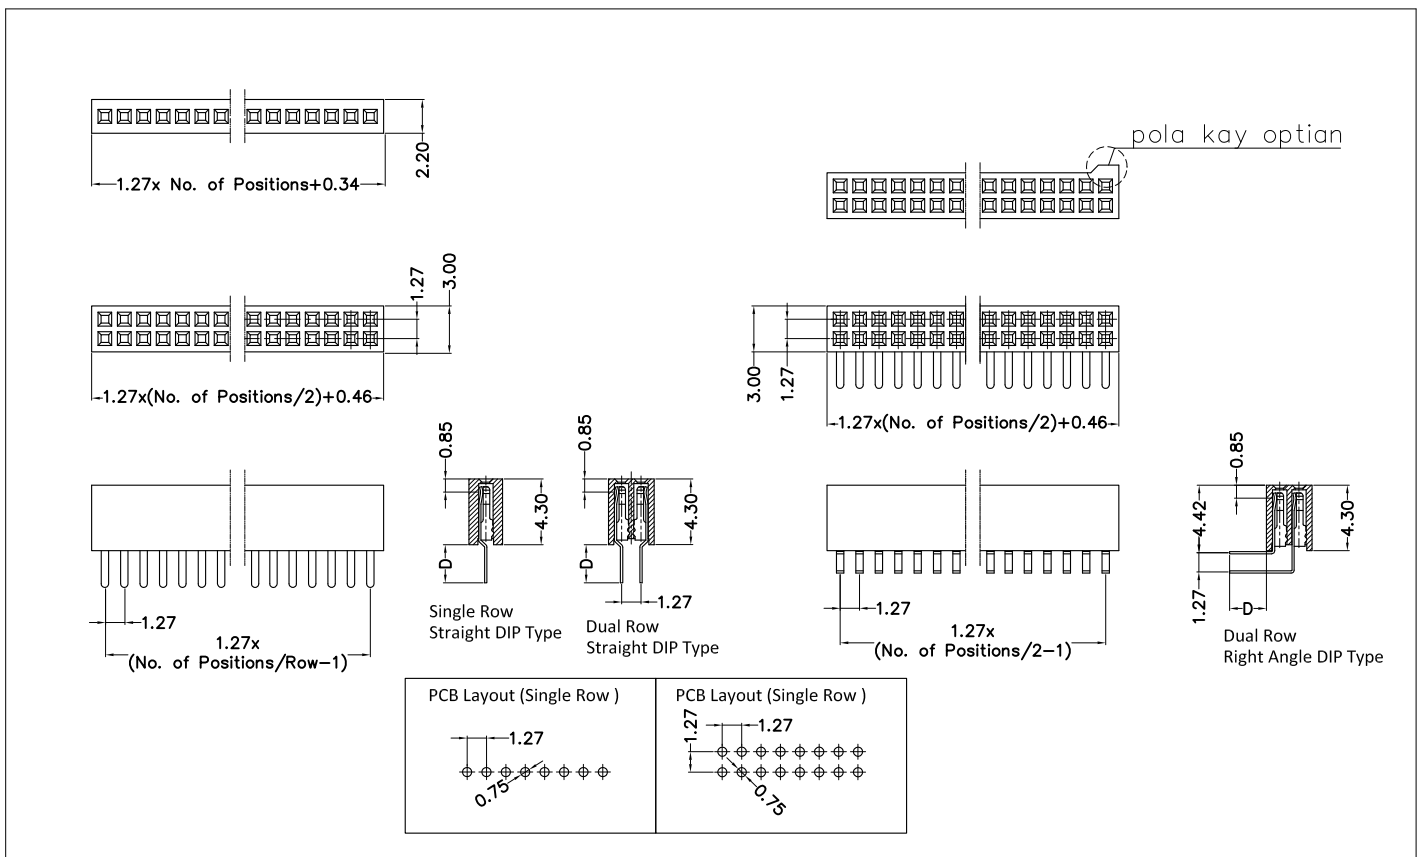

### Ordering Information: F03 - XXX - XX - XX - XXX - XX

1 2 3 4 5 6

1 --> Series Number:	F03		
2 --> Contact Positions:	Single Row: 003~036,	Dual Row: 006~100,	
3 --> Connector Type:	10: Single Row Straight DIP Type,	11: Dual Row Straight DIP Type,	20: Dual Row Right Angle DIP Type,
4 --> Dim. "D" option:	For Straight DIP TYPE:	10: D=2.40,	11: D=3.10,
	For Right Angle DIP TYPE:	20: D=2.40,	
5 --> Plating option:	100: Full Gold Flash Plated	500: Tin Plated	600: Selective Gold Flash Plated
	610: 10U" selective Gold plated	615: 15U" selective Gold plated	
	620: 20U" selective Gold plated	630: 30U" selective Gold plated	
6 --> Pola Key option:	00: Without Pola Key,	01: With Pola Key,	(Note: Omit for the without pola key standard connector )