F32

2.54mm Pitch Female Header Single & Dual Row Straight DIP TYPE (H=8.50mm)

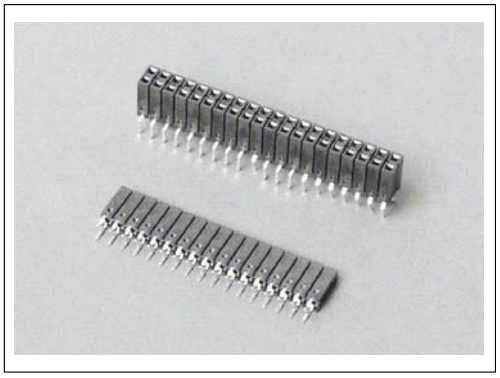

Specification:

Insulator Material:	High Temperature Thermoplastic, UL94V-0.
Contact Material:	Copper Alloy.
Contact Plating:	Au or Sn over Nickel.
Current Rating:	3 AMP.
Contact Resistance:	20 Milliohms Max.
Insulator Resistance:	1000 Megohms Min.
Dielectric Withstanding:	500V AC for 1 Minute.
Operating Temperature:	-40℃ ~ +105℃.
Max. Processing Temp.:	230℃ for 30~60 seconds. 260℃ for 10 seconds.

RoHS Compliant

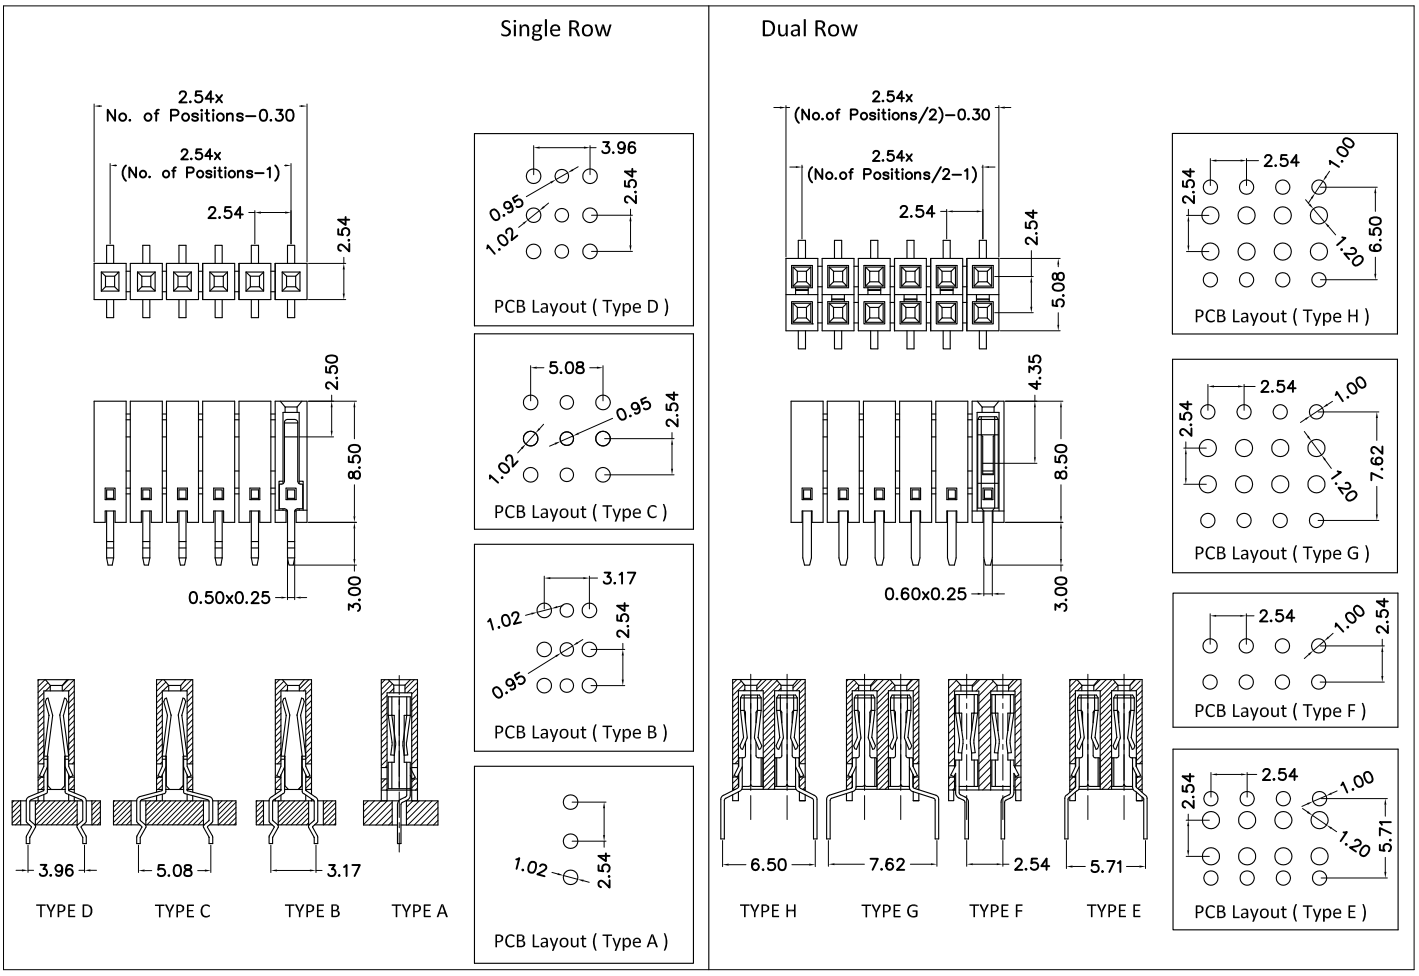

Ordering Information: F32 - XXX - XX - XXX

(1 - 2 - 3 - 4)

1 --> Series Number:	F32			
2 --> Contact Positions:	Single Row: 002~045,	Dual Row: 004~090,		
3 --> Connector Type:	Single Row Type: 10: TYPE A,	11: TYPE B,	12: TYPE C,	13: TYPE D,
	Dual Row Type: 20: TYPE E,	21: TYPE F,	22: TYPE G,	23: TYPE H,
4--> Plating option:	100: Full Gold Flash Plated,	500: Tin Plated,	600: Selective Gold Flash Plated	
	610: 10U" selective Gold plated,	615: 15U" selective Gold plated		
	620: 20U" selective Gold plated,	630: 30U" selective Gold plated		
	Note: selective Gold plated only for Single Row Type B & Type C & Type D,			