




F37


1.27mm Pitch Female Header Single & Dual Row Straight DIP TYPE

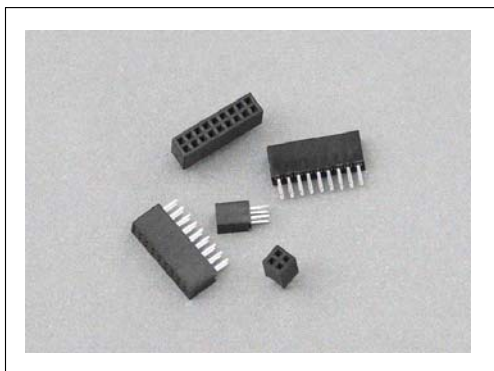

Specification:

Insulator Material:	High Temperature Thermoplastic, UL94V-0.
Contact Material:	Copper Alloy.
Contact Plating:	Au or Sn over Nickel.
Current Rating:	1 AMP.
Contact Resistance:	20 Milliohms Max.
Insulator Resistance:	500 Megohms Min.
Dielectric Withstanding:	500V AC for 1 Minute.
Operating Temperature:	-40°C ~ +105°C.
Max. Processing Temp.:	230°C for 30~60 seconds. 260°C for 10 seconds.

RoHS Compliant

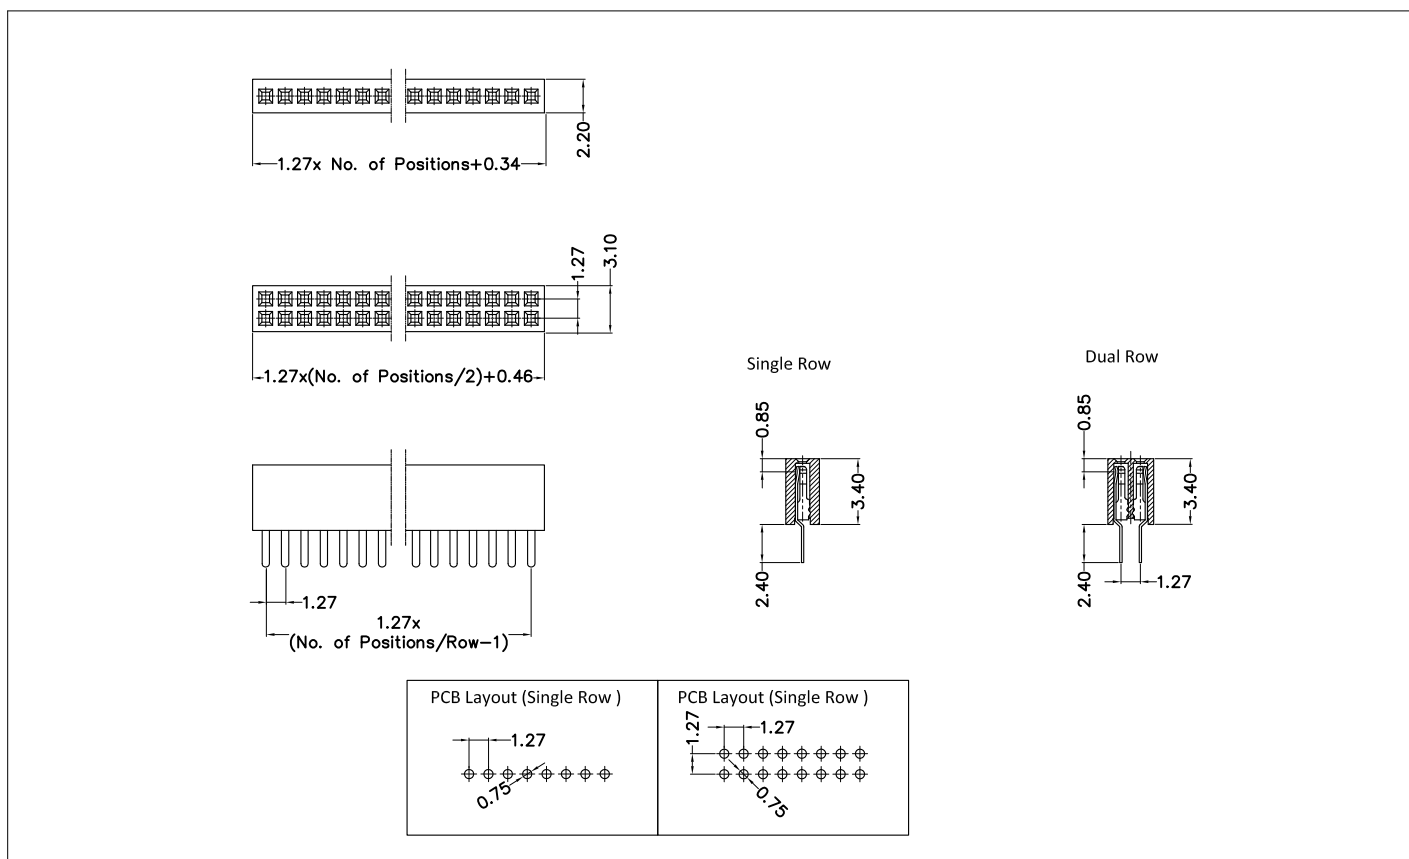

Ordering Information: F37 - XXX - XX - XXX

1
2
3
4

1 --> Series Number:	F37		
2 --> Contact Positions:	Single Row: 003~036, Dual Row: 006~100,		
3 --> Contact Row:	10: Single Row, 20: Dual Row,		
4 --> Plating option:	100: Full Gold Flash Plated	500: Tin Plated	600: Selective Gold Flash Plated
	610: 10U" selective Gold plated	615: 15U" selective Gold plated	
	620: 20U" selective Gold plated	630: 30U" selective Gold plated	